



Connecting the MPG Pendant to the MASSO G3 Touch Control

⚠ CAUTION

1. **Power OFF the Touch Control!**
2. Remove the (4) corner screws from the front of the Touch Control.
3. Open the front of the touch control. Inside you will see the main G3 board. There is a yellow sticker on the right side of the G3 board. If you scan the QR code, it will take you to the MASSO instructions for attaching the MPG. Directly next to the sticker is the DB15 connector that you will plug the MPG into (see Figure 1).



FIGURE 1—The blue arrow points to the MASSO QR code. The blue oval shows the location of the DB15 female connector.

4. In order for the MPG to plug into the G3 board with enough room to close the Touch Control cover, you will need to remove the plastic cover from the DB15 connector on the MPG cable.
5. Insert the MPG cable through the rear access slot in the touch control. Pull it up to the G3 board. Insert the DB15 connector from the DB15 on the MPG cable into the DB15 connector on the G3 board (see Figure 2).

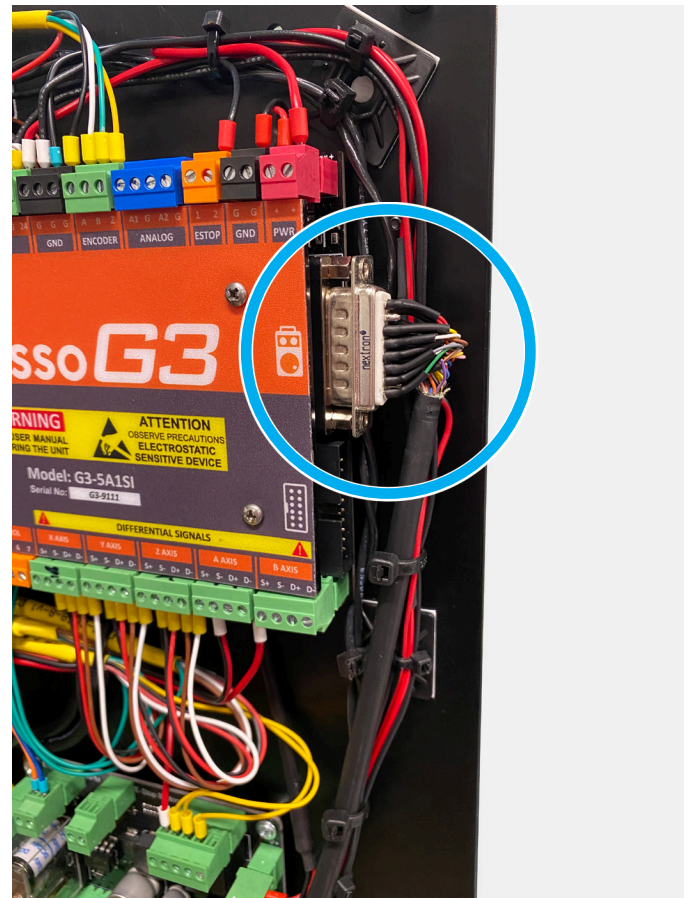


FIGURE 2—The blue circle shows the MPG DB15 male connector hooked up to the DB15 female connector.

6. Using Zip Ties, tie the MPG cable to existing cables in the control panel. Be sure to zip tie to a cable already secured to the control housing (see Figure 3). You want to zip tie here, so the zip tie acts as a cable restraint. This way, if you pull hard on the cable, it will pull against the square zip tie mount and not pull the DB15 connection out or any of the wires to which the cable is zip tied.

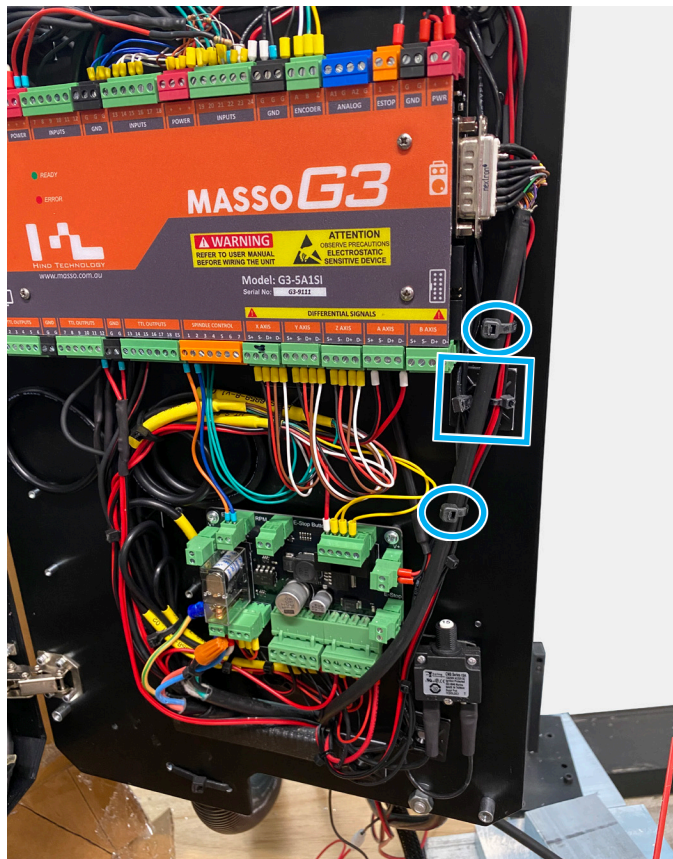


FIGURE 3—The blue square shows the location of the square zip tie mount on the control housing. The blue ovals show additional zip tie locations.

7. Move any wires or cables out of the way so you can close the front of the Touch Control without pinching any wires. Close the control cover. Insert the (4) corner screws and tighten them (just snug).

Thank you,
Sherline Products Inc.